

MODEL : A

**300 LB. WWP UL/FM APPROVED**

## DESCRIPTION

Angle hose valve for Fire protection service,  
Used with a Fire Hose Rack Assembly, or  
as a Fire Hydrant. Outlet connection.

### DOUBLE FEMALE

Female NPT inlet and outlet. 300 psi. rated.  
Cast brass valve with red hand wheel.

### FEMALE x MALE


Female NPT inlet and Male NPT. 300 lb. rated.  
Cast brass valve with red hand wheel.

The globe pattern is the most reliable and  
acceptable valve to service in wet piping system,  
the primary function of hose valve of hose  
valve with angle type to control the water at the  
hose station.



## DIMENSIONS

Size	A (cm)	B (cm)	C (cm)		D (cm)	E (cm)	Wt. (Lbs.)
			Closed	Open			
1 1/2"	5.7	5.7	16.5	19	8.9	5	5
2 1/2"	8.9	8.9	24.1	29.1	12.7	6.9	12

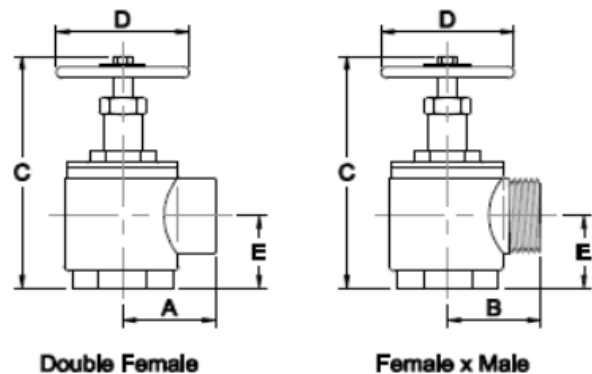

***QUICK COUPLING ADAPTOR  
WITH CAP & CHAIN FOR  
ANGLE HOSE VALVE***



<b>MATERIAL</b>	<b>:</b>	<b>CAST BRASS</b>
<b>CONNECTION</b>	<b>:</b>	<b>NH THREADED</b>
<b>SIZE</b>	<b>:</b>	<b>1 1/2", 2 1/2"</b>