V203

BRONZE GLOBE VALVE

FEATURES & BENEFITS

- Valor bronze globe valves are highly efficient for throttling because seat and disc designs provide flow characteristics with proportionate relationship between valve lift and flow rate

Dimensional Drawing

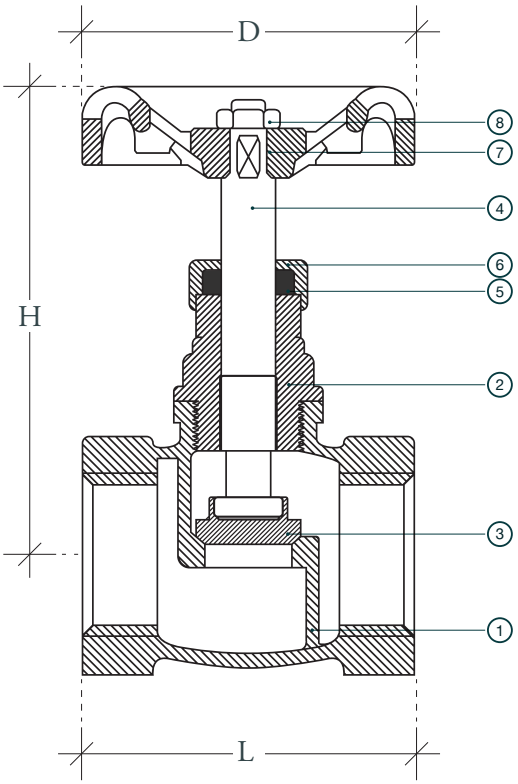

MATERIALS			
No.	Part	Material	Size
1	BODY	Bronze CC491K	ALL
2	BONNET	Bronze CC491K	ALL
3	DISC	PTFE	ALL
4	STEM	Brass CW602N	ALL
5	PACKING	Asbestos Free	ALL
6	PACKING NUT	Brass CW614N	ALL
7	HANDWHEEL	Aluminium	ALL
8	HANDWHEEL NUT	Brass CW614N	ALL

DIMENSIONAL DRAWING			
Size (mm.)	L (mm.)	H (mm.)	D (mm.)
15	60	70	60
20	74	82	65
25	90	92	70
32	100	108	78
40	115	120	92
50	136	140	103

- **Pressure Rating** : 32 Bar (464 PSI) at -10 to 100 °C
  14 Bar (203 PSI) at 198 °C
- **End Connection** : Taper thread to 10226-2 (ISO 7-1) formerly BS - 21 or ANSI B1.20.1
- **Specification** : Metal Disc, Screwed in bonnet
  Valve are manufactured in accordance with BS EN 12288 Formerly BS 5154 and MSS SP-80 and WRAS Approved

VALOR The Best Thailand Brand
E-mail : hvac@masteclink.co.th
Tel. 02-942-1433 (Head Office)