PN16

V201

BRONZE GLOBE VALVE

FEATURES & BENEFITS

- Valor bronze globe valves are highly efficient for throttling because seat and disc designs provide flow characteristics with proportionate relationship between valve lift and flow rate

Dimensional Drawing

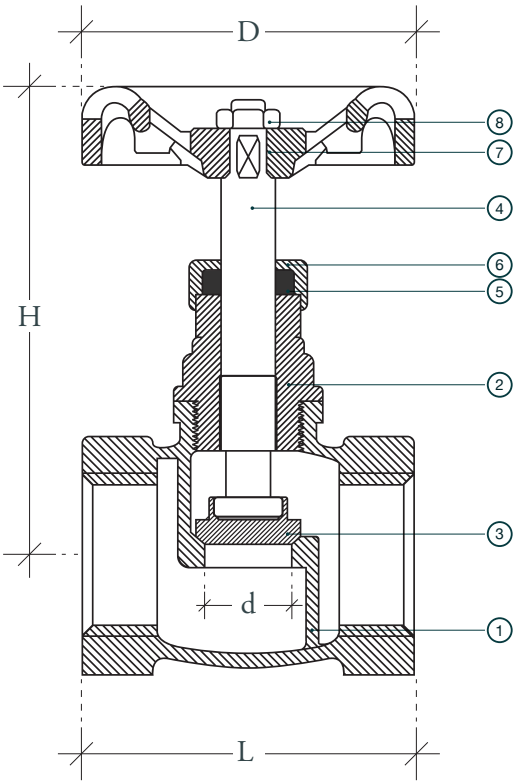

MATERIALS			
No.	Part	Material	Size
1	BODY	Bronze CC491K	ALL
2	BONNET	Bronze CC491K	ALL
3	DISC	Bronze CC491K	DN15-DN25
3	DISC	DZR Brass CW602N	DN32-DN50
4	STEM	DZR Brass CW602N	ALL
5	PACKING	PTFE	ALL
6	PACKING NUT	Brass CW614N	ALL
7	HANDWHEEL	Aluminium	ALL
8	HANDWHEEL NUT	Stainless Steel	ALL

DIMENSIONAL DRAWING				
Size (mm.)	d (mm.)	L (mm.)	H (mm.)	D (mm.)
15	14	49	71	52
20	14	56	73	60
25	19	66	87	65
32	24	74	95	70
40	32	85	110	78
50	38	100	124	92

- **Pressure Rating** : 16 Bar (232 PSI) at -10 to 100 °C
  7 Bar (101.5 PSI) at 170 °C
- **End Connection** : Taper thread to 10226-2 (ISO 7-1) formerly BS - 21 or ANSI B1.20.1
- **Specification** : Metal Disc , Screwed in bonnet

VALOR The Best Thailand Brand
E-mail : hvac@massteclink.co.th
Tel. 02-942-1433 (Head Office)